

Blue Seal Gas Combi Steamer SAPIENS RELOADED G20RSDW 20 x 1/1 GN or 10 x 2/1 GN



GENERAL FEATURES

- Direct Steam injection system
- Perfectly smooth, water tight chamber
- Double tempered glass door with air chamber and interior heat-reflecting glass reduces head radiation towards operator
- Hinged inner glass for easy cleaning
- Adjustable door hinge for optimal seal
- Fan motor thermic protection
- Low water alarm
- Component cooling system with overhear display control
- Self-diagnosis and fault display
- Oven light
- IPX5 spray-proof and hose proof

- Manual controls
- Multi-point core temperature probe
- Variable fan speed with up to 6 speeds
- 95 preset recipe programs, including programs for reheating on the plate / pan
- 99 free programs, up to 9 cycles with name and icon creation
- AUTOCLIMA automatic system for measuring and controlling the humidity in the cooking chamber
- Fast-Dry, quick dehumidification of the cooking chamber
- LED HVS alphanumeric display for temperature, Autoclima, time and core temperature
- 2.4" LCD TFT colour display for favourite programs, preset programs, fan, automatic washing, menus and settings.
- Rapid selection scroller knob for program using scroll & push functions
- LED bars to indication actual cooking cycles in program mode
- Manual pre-heating
- Electronic thermostat 30°C-300°C
- Auto reverse (automatic reversing fan rotation) for perfect cooking uniformity
- Automatically regulated steam condensation
- Manual chamber pressure relief control
- Manual humidifier
- ECOVAPOR automatic control of the system saturation in the cooking chamber
- ECOSPEED oven optimises and controls the delivery of energy to maintain correct cooking temperature
- GREEN FINE TUNING burner modulation system with high efficiency exchanger to prevent power wastage and reduce harmful emissions
- Automatic LCS (Liquid Clean System) with built-in tank and automatic dispensing
- Built-in retractable hand shower with tap
- USB connection to download HACCP data, software updates and storing cooking programs

OPTIONAL FEATURES

- Right hinged door
- Configuration for connection to extraction hood

AUTOCLIMA	FAST DRY	ecovapor	GIEN INE TUNKS	PCD Speed DYNAMIC	eco		\$ \$
AUTOCLIMA	FAST-DRY	ECOVAPOR	GFT	ECOSPEED	ECO WASH	AUTOMATIC WASHING	6 SPEED FAN

Sapiens reloaded

Blue Seal Gas Combi Steamer **SAPIENS RELOADED** G20RSDW 20 x 1/1 GN or 10 x 2/1 GN

Dimensions

Width	11/0mm				
Depth	895mm				
Height	1040mm				
Weight	218kg				
Packed dimensions					
Width	1220mm				
Depth	1040mm				
Height	1250mm				
Weight	242kg				
Shelves					
1/1 GN	20				
2/1 GN	10				
Shelf Spacings	70mm				

Installation requirements

(for precise installation instructions, please refer to the unit's installation manual).

Power connection

Air extraction

requirements 230-240V, 50Hz, 1P+N+E Supply line voltage 1.0kW Electrical power 0A Rated current 3 pin plug (10A) cordset fitted

Gas connection

Nominal gas consumption 97.2MJ/hr Gas connection size R½ Exhaust connection to ventilation system with safety switch.

Observe regulations for gas suppliers.

Installation clearances


- rear 25mm - right 500mm* - left 50mm

*Clearance required on fixed installations for service accessibility. If heat sources are located near the RH side of the Sapiens combi, ensure that a minimum distance of 400mm is maintained. Install in accordance with local body regulations only on horizontal surfaces and not against combustible walls.

Water connection requirements

- Cold waterFlow pressure
- (200-500kPa)
- Soft water connection*
- Shut-off valve with return flow inhibitor and dirt filter
- Water supply R¾
- R50 waste water connection

(*Water softener may be required. Please refer to installation manual for water treatment values.)

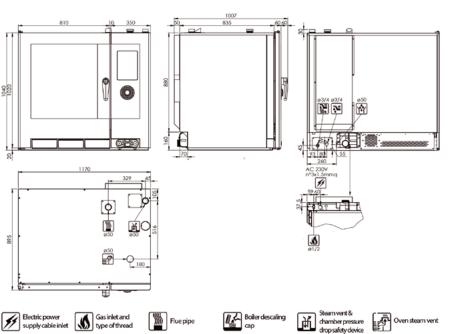

Liquid outlet

- diopsalety device - -----

an Ali Group Company

Steam trap



MOFFAT

Australia www.moffat.com.au

New Zealand www.moffat.co.nz

Australia Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833

New South Wales Telephone 02-8833 4111 nswsales@moffat.com.au

vsales@moffat.com.au

South Australia Telephone 03-9518 3888 vsales@moffat.com.au

Queensland Telephone 07-3630 8600 gldsales@moffat.com.au

Western Australia Telephone 08-9413 2400 wasales@moffat.com.au

New Zealand Moffat Limited

Rolleston

45 Illinois Drive Izone Business Hub Rolleston 7675 Telephone 03-983 6660 Facsimile 03-983 6660 sales@moffat.co.nz

Auckland Telephone 09-574 3150 sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd Moffat 1804

