





Economy Passthrough Dishwasher - 500mm Rack

W 730mm x D 720mm x H 1530mm

Washtech's XP is a versatile, highly efficient, simple-to-use and easy-to-maintain passthrough dishwasher. With one of the industry's lowest water consumption rates along with leading rinse heating, the XP provides excellent wash results in less time, while being light on operating costs and the environment.

The XP features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech dishwasher will not let you down.

Standard Features

- Autostart on hood closure 1, 2 and 3 minute wash cycles
- Washes up to 1,080 plates per hour/1,500 glasses per hour
- Low hot water consumption of 2.2 litres per cycle
- Washtech Hybrid Controls
- Self cleaning cycle
- Easy Installation supplied complete with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - 15 amp plugset
 - No commissioning required
- Heavy-duty stainless steel construction and wash manifold
- Upper and lower wash/rinse arms with precision moulded jets
- Double heavy duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Watermark approved backflow prevention
- · Comprehensive 5-2-1 warranty

Includes:

- 1x 600 70028 500mm dish rack
- 1x 600 70029 500mm cup rack
- 1x C660503 cutlery container


























Economy Passthrough Dishwasher - 500mm Rack

W 730mm x D 720mm x H 1530mm

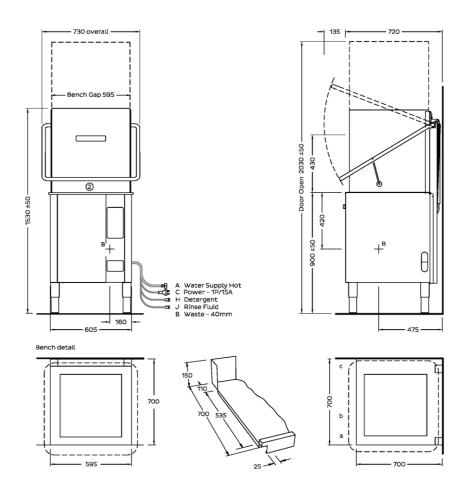

Δ	Hot water	
_		6506
	Temperature	65°C
	Connection	3/4" male; hose supplied
	Pressure	200-350kPa
	Flow	20 litres per min
	Quality	Potable - refer table
	Backflow Prevention	Atmospheric Vacuum Breaker
	Consumption	2.2 litres per cycle*

	Line	2 BSb			
С	Electrical	v	Hz	A/phase	max kW
	Single Phase	240	50	15	3.75
	Three Phase	415	50	15	9.00

1.5" BSP

Corner Installation Notes:

Waste Connection

- a. Machine must face left for easy access to controlsb. Allow 300 clearance to front for service access

c. Splashback return must be no higher than 150

Depth Height Weight Cubicmetres	720 1530 94	830 1450 125 0.91
Water Quality pH Hardness ppm Cl- SO ₄ Fe Mn Gu	Min 7 20	Max 8 100 100 400 0.1 0.5 0.05

Dimensions Width Depth Height Weight Cubicmetres	Machine 730 720 1530 94	Packed 760 830 1450 125 0.91
Water Quality pH Hardness ppm Cl- SO ₄ Fe Mn Cu Cl ₂	Min 7 20	Max 8 100 100 400 0.1 0.5 0.05 0.1





moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9158 3833 vsales@moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia Telephone 03-9518 3888 vsales@moffat.com.au

Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9202 6820 wasales@moffat.com.au



All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Version: 1806

Referoperator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Isolating water valve must be readily accessible.

*Consumption may vary with site conditions.



