

AL8C

High Efficiency Passthrough Warewasher with Heat Condensing Unit

- 500mm x 600 mm Rack

W 905mm x D 765mm x H 1925mm

The Washtech AL8C is a versatile passthrough warewasher designed to wash and sanitise bins, crates, bowls and other oversized items more effectively than a manual cleaning process. All while using considerably less labour, energy, water and chemicals.

The AL8C includes a highly efficient Heat Condensing Unit along with low water consumption provided by all Washtech machines. This ensures optimal cost savings and minimal environmental impact through significantly reduced energy consumption and steam emissions from the standard model, all while providing a cooler/drier operating environment.

Special Features

- A full heat condensing unit which preheats cold water supply, significantly reducing steam emissions and energy consumption
- Self-cleaning jets located in the condenser ensure longevity of the unit and a similar maintenance regime to the standard AL8
- Operates on cold water supply for enhanced energy efficiency and lower cost water treatment when required

Standard Features

- Versatile 2, 4 and 6 minute cycles
- Large internal wash chamber with useable area W 700mm x D 540mm x H 650mm
- Easy installation supplied complete with:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - No commissioning required
- Powerful wash pump recirculates water at nominal 800 litres per minute ensuring items are thoroughly washed
- Fast recovery between cycles through powerful rinse heating aided by the highly efficient heat recovery unit
- Reliable results through robust stainless steel wash and rinse arms with precision stainless jets
- Double filtration system including stainless steel scrap trays and pump filters
- Easy to open counter sprung hood provides access to all 3 sides of the internal chamber
- Durable stainless steel construction
- Moffat's Comprehensive 5-2-1 Warranty
- Cold water consumption of 3.0 litres per cycle
- Easy to maintain electromechanical design


Includes:

- 1x 600 70042 - 500mm x 600mm dish rack
- 1x 600 70043 - 500mm x 600mm cup rack
- 1x C660503 - cutlery container
- 1x C660508 - cutlery basket
- 1x k0452 - 435mm cup cover



AL8C

High Efficiency Passthrough Warewasher with Heat Condensing Unit - 500mm x 600 mm Rack
W 905mm x D 765mm x H 1925mm

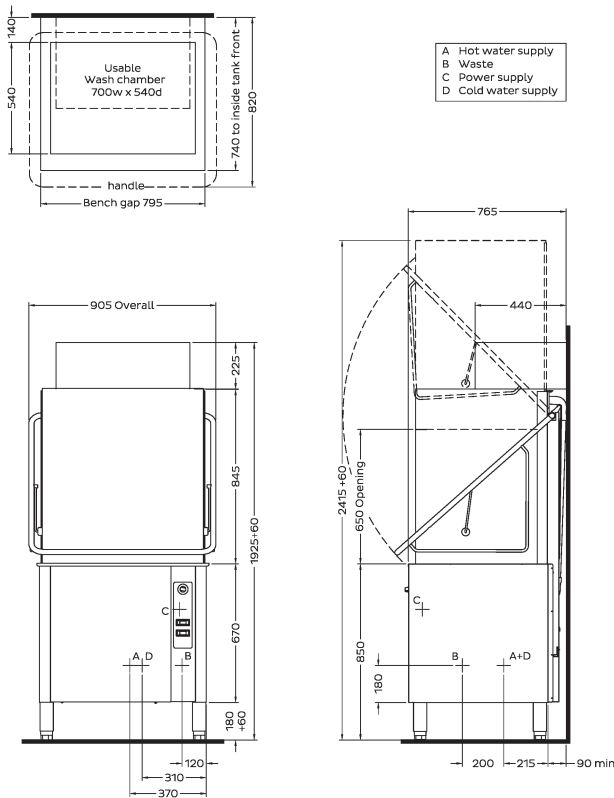

MOFFAT®

moffat.com.au

Australia
 Moffat Pty Limited

Victoria/Tasmania
 740 Springvale Road
 Mulgrave, Victoria 3170
 Telephone 03-9518 3888
 Facsimile 03-9518 3833
 vsales@moffat.com.au
 www.moffat.com.au

New South Wales
 Telephone 02-8833 4111
 nswsales@moffat.com.au

South Australia
 Telephone 03-9518 3888
 vsales@moffat.com.au

Queensland
 Telephone 07-3630 8600
 qldsales@moffat.com.au

Western Australia
 Telephone 08-9413 2400
 wasales@moffat.com.au

ISO9001
 All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
 Moffat / 08.17

A Hot Water (Fill only)

Temperature	65°C
Connection	3/4" male hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable & soft
Backflow Prevention	Atmospheric Vacuum breaker

D Cold Water

Temperature	20°C
Connection	3/4" male hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable & soft
Backflow Prevention	Atmospheric Vacuum breaker
Consumption	3.0 litres per cycle

B Waste

Connection	1.5" BSP
Line	2" BSP

C Electrical

Three phase	415V 50Hz 25A/phase
Maximum Power Consumption	
Three Phase	18.0kW
Heating	
Wash	5.0kW
Rinse	9.0kW

Dimensions

Width	905mm
Depth	765mm
Height	1925mm
Weight	180kg

Packed Dimensions

Width	1000mm
Depth	910mm
Height	1875mm
Weight	206kg
Cubicmetres	1.70m ³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl-	SO ₄	Fe	Mn	Cu	Cl ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions

