

TW

Undercounter Traywasher - 500mm Rack

W 860mm x D 655mm x H 845mm

The Washtech Warewashing range represents the most powerful utensil, container and tray washing units in the Washtech line up. These machines are built to increase the efficiency of most operations by promoting continuous clean up. With large internal chambers and a range of cycle times, the savings in labour, water, chemicals and energy assure rapid payback times.

The Washtech TW washes cups, plates and cutlery in standard 500mm dishracks, plus racks and baking trays up to 750mm by 450mm, and many mixing bowls, bins etc. The Washtech TW can be installed under regular height benches and has a huge wash compartment 800mm wide by 500mm deep by 460mm high. Unique controls allows the operator to start a two, four or six minute-cycle with one touch of the ergonomically positioned upper controls to wash a wide range of items.

Standard Features

- Versatile 2, 4 and 6 minute cycles
- Double filtration system including stainless steel scrap trays and pump filters.
- Large internal chamber with usable area W 800mm x D 545mm x H 460mm
- Reliable results through robust stainless steel rinse arms with precision stainless jets
- Easy to maintain electromechanical design
- Durable stainless steel construction
- Moffat's Comprehensive 5-2-1 Warranty
- Drain pump with flexible connection
- Detergent Pump fitted
- Low hot water consumption of 4.0 litres per cycle


Includes:

- 1 x 815 10031 - tray rack
- 1 x 600 70028 - 500mm dish rack



TW

Undercounter Traywasher - 500mm Rack
W 860mm x D 655mm x H 845mm

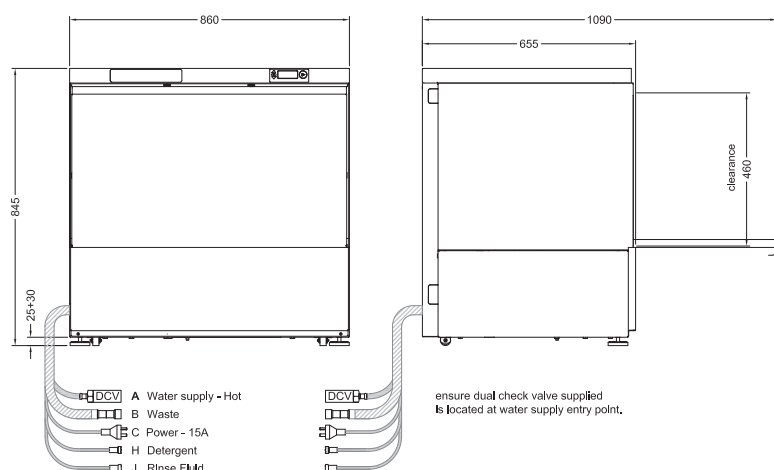

MOFFAT®

moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au



A Hot Water	
Temperature	65°C
Connection	3/4" male hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable & soft
Backflow Prevention	Dual Check Valve (DCV)
Consumption	4.0 litres per cycle
B Waste	
Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
C Electrical	
Single phase	240V 50Hz 15A plugset supplied
Maximum Power Consumption	
Single phase	3.0kW
Heating	
Wash	2.5kW
Rinse	5.0kW

Dimensions	
Width	860mm
Depth	655mm
Height	845mm
Weight	100.5kg

Packed Dimensions	
Width	980mm
Depth	800mm
Height	990mm
Weight	122.5kg
Cubicmetres	0.78m3

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl ⁻	SO ₄	Fe	Mn	Cu	CL ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions

ISO9001

All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Moffat / 11.16

an Ali Group Company



The Spirit of Excellence