



MIXER ELECTRIC MARKETS 1 0 L I T R E

NOTE:

When viewing the appliance from the front in its usual operating position, the width (W) of the product is the total distance from left to right; the depth (D) of the product is the total distance from front to back; the height (H) is the total distance form the bottom of the product to the top.

MIXING BOWL XPMA 1029



BEATER XPMA 1030




DOUGH HOOK XPMA 1031



WIRE WHISK XPMA 1032



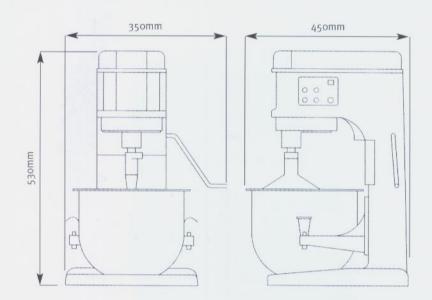


DESCRIPTION MODELS	MIXER 10QT WITH GUARD PMA 1010	DESCRIPTION OF ACCESSORIES	
		MIXING BOWL	XPMA 1029
VOLTAGE (V)	240V	BEATER	XPMA 1030
POWER (W)	650w	DOUGH HOOK	XPMA 1031
PLANETARY SPEED (rpm)	100 - 500	WIRE WHISK	XPMA 1032
DIMENSIONS (mm) (W x D x H)	350 x 450 x 530		
BOX DIMENSIONS (mm) (W x D x H)	410 x 530 x 630		
SHIPPING WEIGHT (kg)	22kg		
UNIT WEIGHT (kg)	20kg		

DISTRIBUTED BY:

Note: Output performance figures quoted





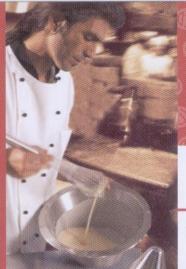



MIXER ELECTRIC

GOLD SERIES - DIRECT DRIVE GEAR TRANSMISSION - 10 LITRE



MIXER ELECTRIC 1 0 L I T R E

"Anvil's 10 Litre Mixers are designed specifically for small commercial mixing applications. This compact tabletop mixer is small enough to fit into any kitchen yet robust enough for continuous use."

APPLICATION

- IDEAL FOR DELIS, SMALL BAKERIES, HOME INDUSTRIES AND AS A BATCH MIXER
- SUPPLIED WITH MIXING BOWL, WIRE WHISK, DOUGH HOOK AND BEATER. THESE ITEMS ARE ALSO AVAILABLE SEPARATELY
- CONSISTENT MIXING SPEEDS ARE MAINTAINED REGARDLESS OF THE VOLUME IN THE BOWL DUE TO THE DIRECT DRIVE TRANSMISSION SYSTEM

CONSTRUCTION

- HEAVY DUTY CONSTRUCTION
- POWERFUL o.8HP AIR COOLED MOTOR
- 5 FIXED SPEEDS
- DIRECT DRIVE 100% GEAR DRIVEN TRANSMISSION
- LONG-LIFE GEAR BOX
- GREASE PACKED BALL BEARING
- 240v SINGLE PHASE
- GUARD FITTED WITH SAFETY MICRO-SWITCH
- GEARS AND SHAFTS MADE OF HEAT TREATED ALLOY STEEL

Anvil reserves the right, without notice, to make changes and revisions to product specifications, materials and design, which in our opinion, will provide better performance, durability and efficiency.

